




NEVHB01

CREE  CE  



CONSTRUCTION:

- Die-cast Aluminum
- Cree LED chip
- Operating temperature: -40° - +60°
- Beam angle: 90°
- IP65




APPLICATIONS:

- Offices
- Hyper markets
- Commercial areas
- Exhibition halls
- Factories
- Warehouse

TECHNICAL DETAILS:

Model	Watts	Color Temp	Lumens	CRI	Input
NEVHB01	50W	3000K/6000K	5000lm	>72	AC100- 240V
NEVHB01	100W	3000K/6000K	10000lm	>72	AC100- 240V
NEVHB01	150W	3000K/6000K	15000lm	>72	AC100- 240V

Photometric Data

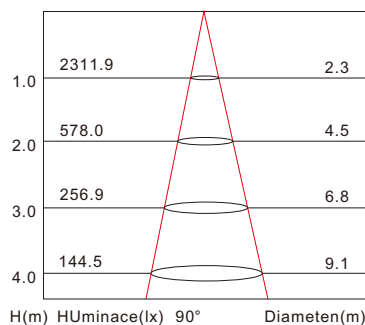

Model	A	B	C	D
NEVHB01/50W	Ø358	143	299	220
NEVHB01/100W	Ø459	184	389	270
NEVHB01/150W	Ø561	234	488	350