

NEVHSL5050



■ DC24V(120LEDs/M)



■ DC12V(60LEDs/M)



■ AC220-240V(60LEDs/M)



CONSTRUCTION:

- Material: Silicone rubber, extrusion forming
- LEDs: SMD LEDs
- UV and yellowish resistant ame retardant UL 94 V-0
- Flexible and 3 LEDs cuttable
- Beam angle: 120°

OPTIONS:


- IP65/IP68
- 12V/24V: 5m/roll
- 220-240V: 100m/roll

APPLICATIONS:


- Cove lighting
- Cornice lighting
- Corridors
- Patios
- Pergolas

TECHNICAL DETAILS:

Model	Watts	Color Temp	Lumens	CRI	Input
NEVHSL5050/60P	10W/M	27000K/3000K/4000K/6500K	750lm	>80	DC12V
NEVHSL5050/60P	10W/M	27000K/3000K/4000K/6500K	750lm	>80	AC220-240V
NEVHSL5050/120P	18W/M	27000K/3000K/4000K/6500K	1350lm	>80	DC24V

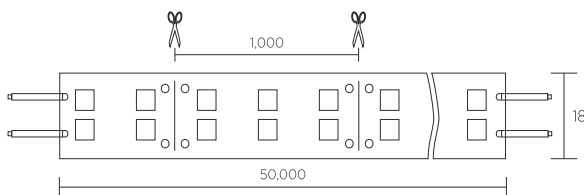

NEVHSL5050/120P

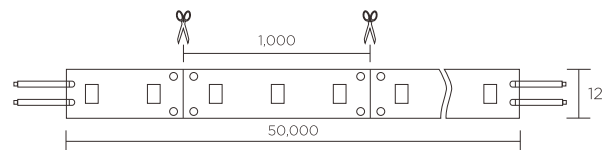

NEVHSL5050/60P