



NEVIG01

CREE CE



CONSTRUCTION:

- Die- cast aluminum housing
- 316 stainless steel bezel
- Tempered glass cover 5mm thick
- Cree LEDs
- PVC mounting sleeve
- Weight limit: 321kg on area ø10mm
- LED driver included with 110-240V versions only
- Beam angle: 30°
- IP67


APPLICATIONS:

- Outdoor decorative lighting
- Paths
- Squares and parks

TECHNICAL DETAILS:

Model	Watts	Color Temp	Lumens	Beam angle	CRI	Input
NEVIG01	2.5W	3000K	65lm	30°	>80	DC 24V
NEVIG01	6W	3000K	375lm	20°	>80	DC 24V
NEVIG01	13.5W	3000K	783lm	20°	>80	DC 24V
NEVIG01	18W	3000K	1605lm	20°	>80	DC 24V


Photometric Data



Illuminance at a Distance

Center Beam LUX	Beam Width V	Beam Width H
76.88 LUX	0.9m	0.9m
19.22 LUX	1.8m	1.8m
8.54 LUX	2.7m	2.7m
4.81 LUX	3.6m	3.6m
3.08 LUX	4.5m	4.5m
2.14 LUX	5.4m	5.4m

Vert. Spread: 25.4 Horiz. Spread: 25.4

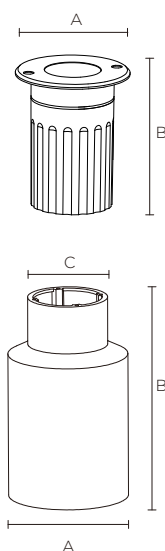

Model	A	B
NEVIG01/2.5W	65	103
NEVIG01/6W	116	73
NEVIG01/13.5W	173	77
NEVIG01/18W	185	75

Model	A	B	C
NEVIG01/2.5W	90	150	60
NEVIG01/6W	74	150	102
NEVIG01/13.5W	118.5	149.5	156.5
NEVIG01/18W	170	120	171.5