

NEVML10

CREE  CE  



CONSTRUCTION:

- CREE COB
- Die-cast aluminum housing and heat sink
- Separate Eaglerise driver included
- 3 years warranty

OPTIONS:

- Beam angle: 15° 24° 38° 60°
- Color: White/Black

APPLICATIONS:


- Retail stores
- Restaurants & bars
- Residential

TECHNICAL DETAILS:

Model	Watts	Color Temp	Lumens	Beam angle	CRI	Input
NEVML10-1	6W	3000K/4000K/5000K	550lm	15° 24° 38° 60°	90	220-240V
NEVML10-2	2*6W	3000K/4000K/5000K	1050lm	15° 24° 38° 60°	90	220-240V
NEVML10-3	3*6W	3000K/4000K/5000K	1550lm	15° 24° 38° 60°	90	220-240V
NEVML10-1	12W	3000K/4000K/5000K	1050lm	15° 24° 38° 60°	90	220-240V
NEVML10-2	2*12W	3000K/4000K/5000K	2050lm	15° 24° 38° 60°	90	220-240V
NEVML10-3	3*12W	3000K/4000K/5000K	3100lm	15° 24° 38° 60°	90	220-240V

Photometric Data

COB 12W±10% 3000K 24°

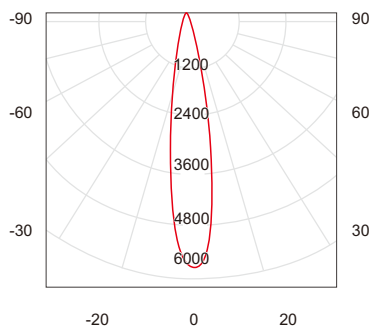

Distance (m)	Illuminance (lx)	Beam Diameter (cm)
1m	5711	31.13
2m	1428	62.25
3m	634.6	93.38
4m	357.0	124.51
5m	228.5	155.63

