

NEVML20

CREE CE IP20



CONSTRUCTION:

- CREE COB
- Die-cast aluminum housing and heat sink
- Separate Eaglerise driver included
- 3 years warranty

OPTIONS:

- Beam angle: 15° 24° 38° 60°
- Color: White/Black


APPLICATIONS:

- Retail stores
- Restaurants & bars
- Residential

TECHNICAL DETAILS:

Model	Watts	Color Temp	Lumens	Beam angle	CRI	Input
NEVML20-1	24W	3000K/4000K/5000K	2050lm	15° 24° 38° 60°	90	220-240V
NEVML20-2	2*24W	3000K/4000K/5000K	4100lm	15° 24° 38° 60°	90	220-240V
NEVTL20-3	3*24W	3000K/4000K/5000K	6150lm	15° 24° 38° 60°	90	220-240V

Photometric Data

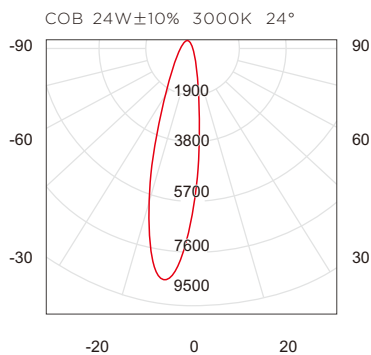

1m	9117	37.76
2m	2279	75.52
3m	1013	113.28
4m	569.8	151.04
5m	364.7	188.80

(lx) (cm)

