


NEVSL2835/NEVSL5050




RGB infrared controller and remote



Power connector for single color (with/without plug)



Power connector for RGB color



Solderless RGB color middle connector



Heat shrink



Head cap End cap



Mounting clip



Solderless single color middle connector

CONSTRUCTION:


- For use with 12V constant voltage driver
- 5m/roll with no driver

OPTIONS:

- Voltage: 24V version for choice
- IP rating: choice of IP20/IP65

APPLICATIONS:

- Cove lighting
- Cornice lighting
- Corridors
- Patios
- Pergolas

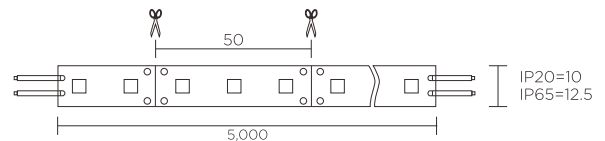

TECHNICAL DETAILS:

Model	Watts	Color Temp	Lumens	CRI	Input
NEVSL2835/60P	4.8W	2700K/3000K/4000K/6500K	380lm	>80	12/24V
NEVSL5050/60P	14.4W	2700K/3000K/4000K/6500K	800lm	>80	12/24V
NEVSL5050/60P	14.4W	RGB	-	>80	12/24V