

NEVSP60/D

CREE  CE  



CONSTRUCTION:

- CREE COB
- Die-cast aluminum housing and heat sink
- Semi white or white power coated finish
- Glass cover
- Adjustable: Horizontal 360°, Vertical 45°
- Seperate driver included
- 3 years warranty

OPTIONS:

- Beam angle: 15° 24° 40° 60°
- Color: White/Black

APPLICATIONS:


- Hotels
- Shopping malls
- Theatres
- Museum

TECHNICAL DETAILS:

Model	Watts	Color Temp	Lumens	Beam angle	CRI	Input
NEVSP60-1/D	9W	3000K/4000K/5000K	800lm	15° 24° 40° 60°	>80	220-240V
NEVSP60-2/D	15W	3000K/4000K/5000K	1300lm	15° 24° 40° 60°	>80	220-240V
NEVSP60-4/D	24W	3000K/4000K/5000K	2050lm	15° 24° 40° 60°	>80	220-240V
NEVSP60-5/D	30W	3000K/4000K/5000K	2850lm	15° 24° 40° 60°	>80	220-240V
NEVSP60-6/D	40W	3000K/4000K/5000K	3600lm	15° 24° 40° 60°	>80	220-240V


Photometric Data

COB 15W±10% 3000K 24°

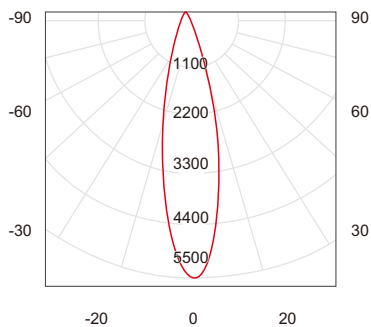

Distance (m)	Beam Diameter (cm)	Beam Diameter (cm)
1m	5379	43.69
2m	1345	87.38
3m	597.6	131.06
4m	336.2	174.75
5m	215.2	218.43

(lx) (cm)

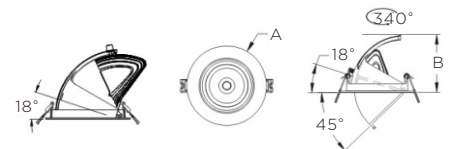

Model	A	B	Cutout
NEVSP60-1/D	105	82	Ø90
NEVSP60-2/D	105	82	Ø90
NEVSP60-4/D	140	114.5	Ø125
NEVSP60-5/D	158	130	Ø145
NEVSP60-6/D	188	159	Ø170