

NEVTL10

CREE CE IP20



CRI 90

CONSTRUCTION:

- CREE COB
- Die-cast aluminum housing and heat sink
- Built-in driver
- 3 years warranty

OPTIONS:

- Beam angle: 15° 24° 38°
- Color: White/Black


APPLICATIONS:

- Fashion shops
- Supermarkets
- Retail stores
- Shop windows


TECHNICAL DETAILS:

Model	Watts	Color Temp	Lumens	Beam angle	CRI	Input
NEVTL10	12W	3000K/4000K/5000K	1050lm	15° 24° 38°	90	220-240V
NEVTL10	20W	3000K/4000K/5000K	1700lm	15° 24° 38°	90	220-240V
NEVTL10	35W	3000K/4000K/5000K	3000lm	15° 24° 38°	90	220-240V

Photometric Data

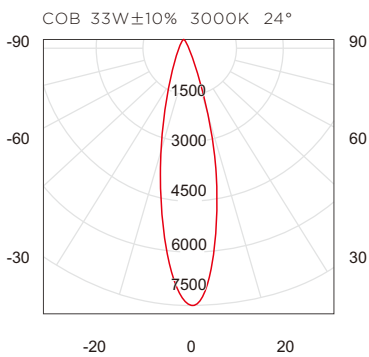

Distance (m)	Beam Diameter (cm)	Center Illuminance (lx)
1m	45.10	7281
2m	90.19	1820
3m	135.29	809.0
4m	180.39	455.1
5m	225.49	291.2

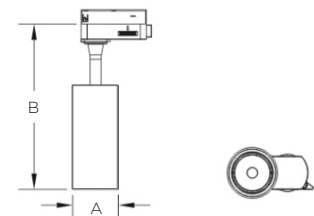

Model	A	B
NEVTL10/12W	52	188
NEVTL10/20W	55	235.5
NEVTL10/35W	72	246