

NEVUW01



CONSTRUCTION:

- 316 stainless steel housing and front cover
- EPDM gasket
- 8mm tempered glass
- High quality LED chips
- LED driver not included
- Beam angle: 25°
- IP68

APPLICATIONS:




- Fountains
- Underwater decorations

TECHNICAL DETAILS:

Model	Watts	Color Temp	Lumens	Beam angle	CRI	Input
NEVUW01	17W	3000K	567lm	25°	>80	DC 24V
NEVUW01	17W	6000K	700lm	25°	>80	DC 24V
NEVUW01	25W	RGB	774lm	25°	>80	DC 24V

Photometric Data

NEVUW01

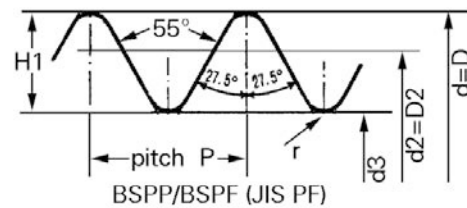

British Pipe Thread (Whitworth Form) -- Parallel (BSPP/BSPF)

Thread Designation	Nominal Size	Thread Form Type	Major Diameter mm d=D	Pitch mm p	Threads per inch	Pitch Diameter mm d2=D2	Minor Diameter Male Thd. d3	Thread Height H1	Tap Drill Diameter mm
G3/4	3/4"	BSPF	26.441	1.814	14	25.279	24.117	1.162	24.50